


改訂	内容・ゾーン	担当者	承認

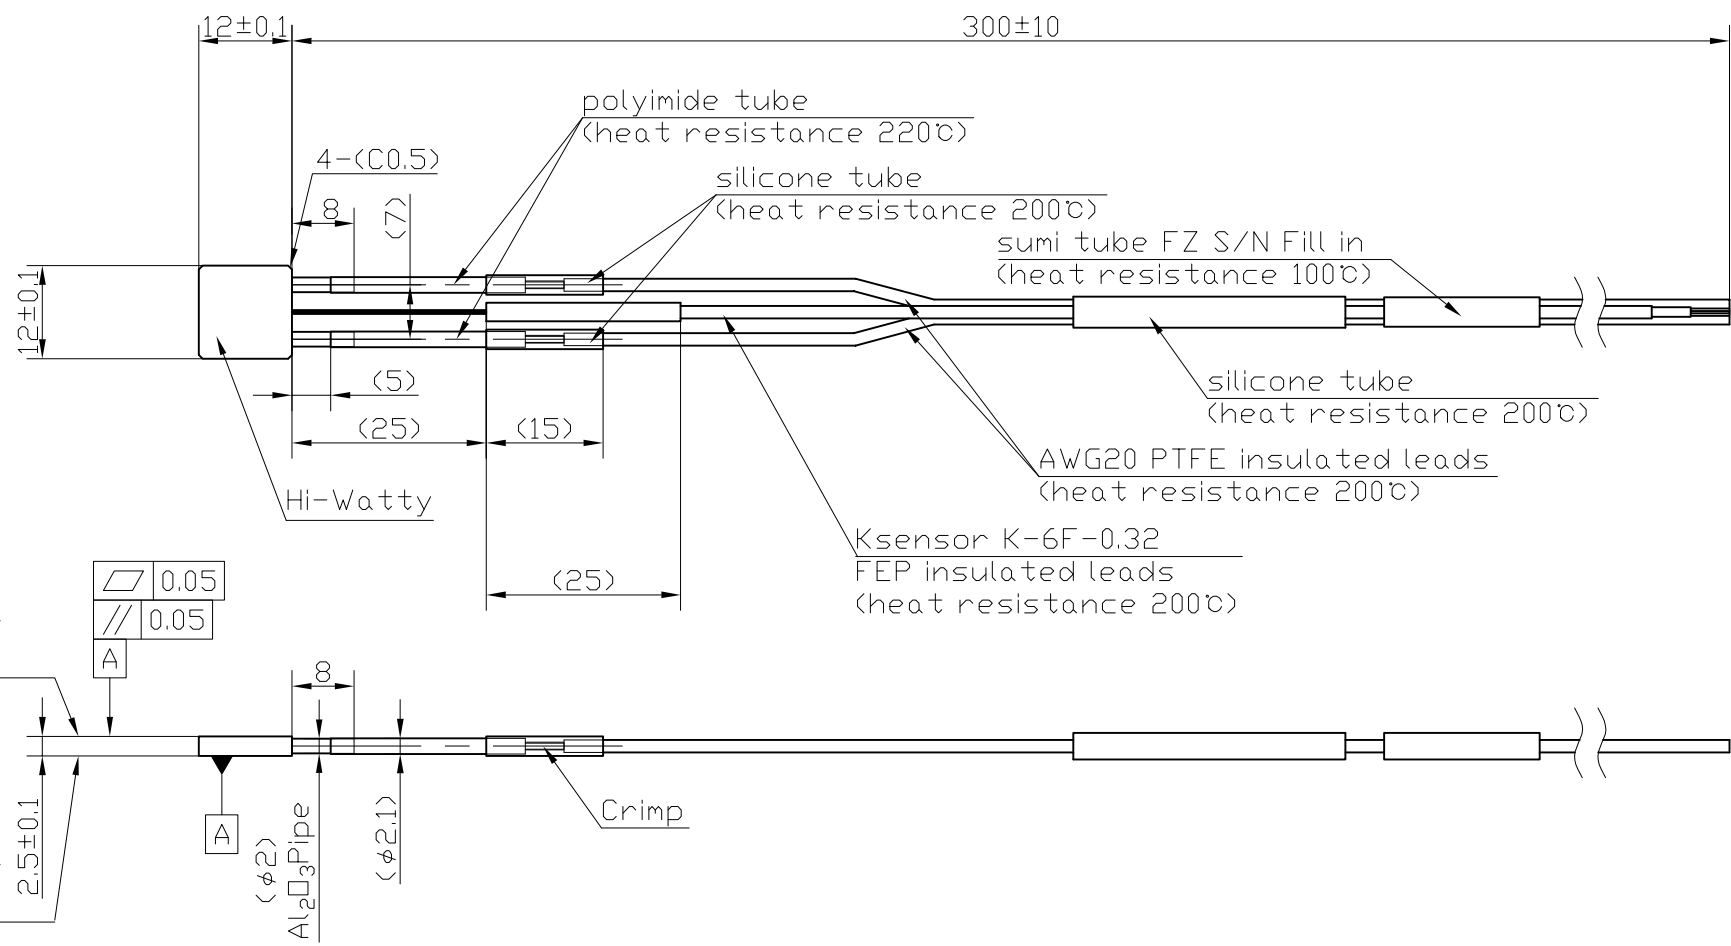

- NOTES
- 1.Voltage:24V
 - 2.Power:50.0~75.0W(AT25°C)
 - 3.Resistance:9.6Ω±20%(7.7~11.5Ω)(AT25°C)
 - 4.Maximum Temperature:400°C

1		品名		数量		材質・仕様		備考																																											
材質	図面番号	SIZE	仕上	場所	備考	図面番号		単位																																											
012 Hi-Watty Light TypeA		External view		KM05342-V01				mm																																											
<table border="1"> <tr> <th>外径等級</th> <th>検閲等対照表</th> <th>一般寸法公差</th> <th>軸線</th> <th>中線</th> <th>直径</th> <th>名称</th> </tr> <tr> <td>S</td> <td>Ra 1.57</td> <td>0.05mm 30°F</td> <td>±0.05</td> <td>±0.1</td> <td>±0.2</td> <td></td> </tr> <tr> <td>H</td> <td>0.6</td> <td>0.4</td> <td>±0.05</td> <td>±0.1</td> <td>±0.3</td> <td></td> </tr> <tr> <td>M</td> <td>0.4</td> <td>0.8</td> <td>±0.1</td> <td>±0.2</td> <td>±0.5</td> <td></td> </tr> <tr> <td>L</td> <td>0.8</td> <td>1.6</td> <td>±0.15</td> <td>±0.3</td> <td>±0.8</td> <td>尺度</td> </tr> <tr> <td>G</td> <td>3.2</td> <td>6.3</td> <td>±0.3</td> <td>±0.8</td> <td>±2</td> <td></td> </tr> </table>		外径等級	検閲等対照表	一般寸法公差	軸線	中線	直径	名称	S	Ra 1.57	0.05mm 30°F	±0.05	±0.1	±0.2		H	0.6	0.4	±0.05	±0.1	±0.3		M	0.4	0.8	±0.1	±0.2	±0.5		L	0.8	1.6	±0.15	±0.3	±0.8	尺度	G	3.2	6.3	±0.3	±0.8	±2		設計製図 積田 承認		承認		18.07.27 18.07.27 18.07.27		ワッディー 株式会社	
外径等級	検閲等対照表	一般寸法公差	軸線	中線	直径	名称																																													
S	Ra 1.57	0.05mm 30°F	±0.05	±0.1	±0.2																																														
H	0.6	0.4	±0.05	±0.1	±0.3																																														
M	0.4	0.8	±0.1	±0.2	±0.5																																														
L	0.8	1.6	±0.15	±0.3	±0.8	尺度																																													
G	3.2	6.3	±0.3	±0.8	±2																																														

ABCDEFGHIJKLMNPQRSTU VWXYZ Zabcd efg hijklmnpqrstuvwxy z