


改訂	内容・ゾーン	担当者	承認
△	Dimensional tolerance	19.03.05 栗原	19.03.05 大石
△	NOTES Change	19.05.14 栗原	19.05.14 大石
△	P.No. table added, Notes2,3change	19.10.28 平田	19.10.28 小川

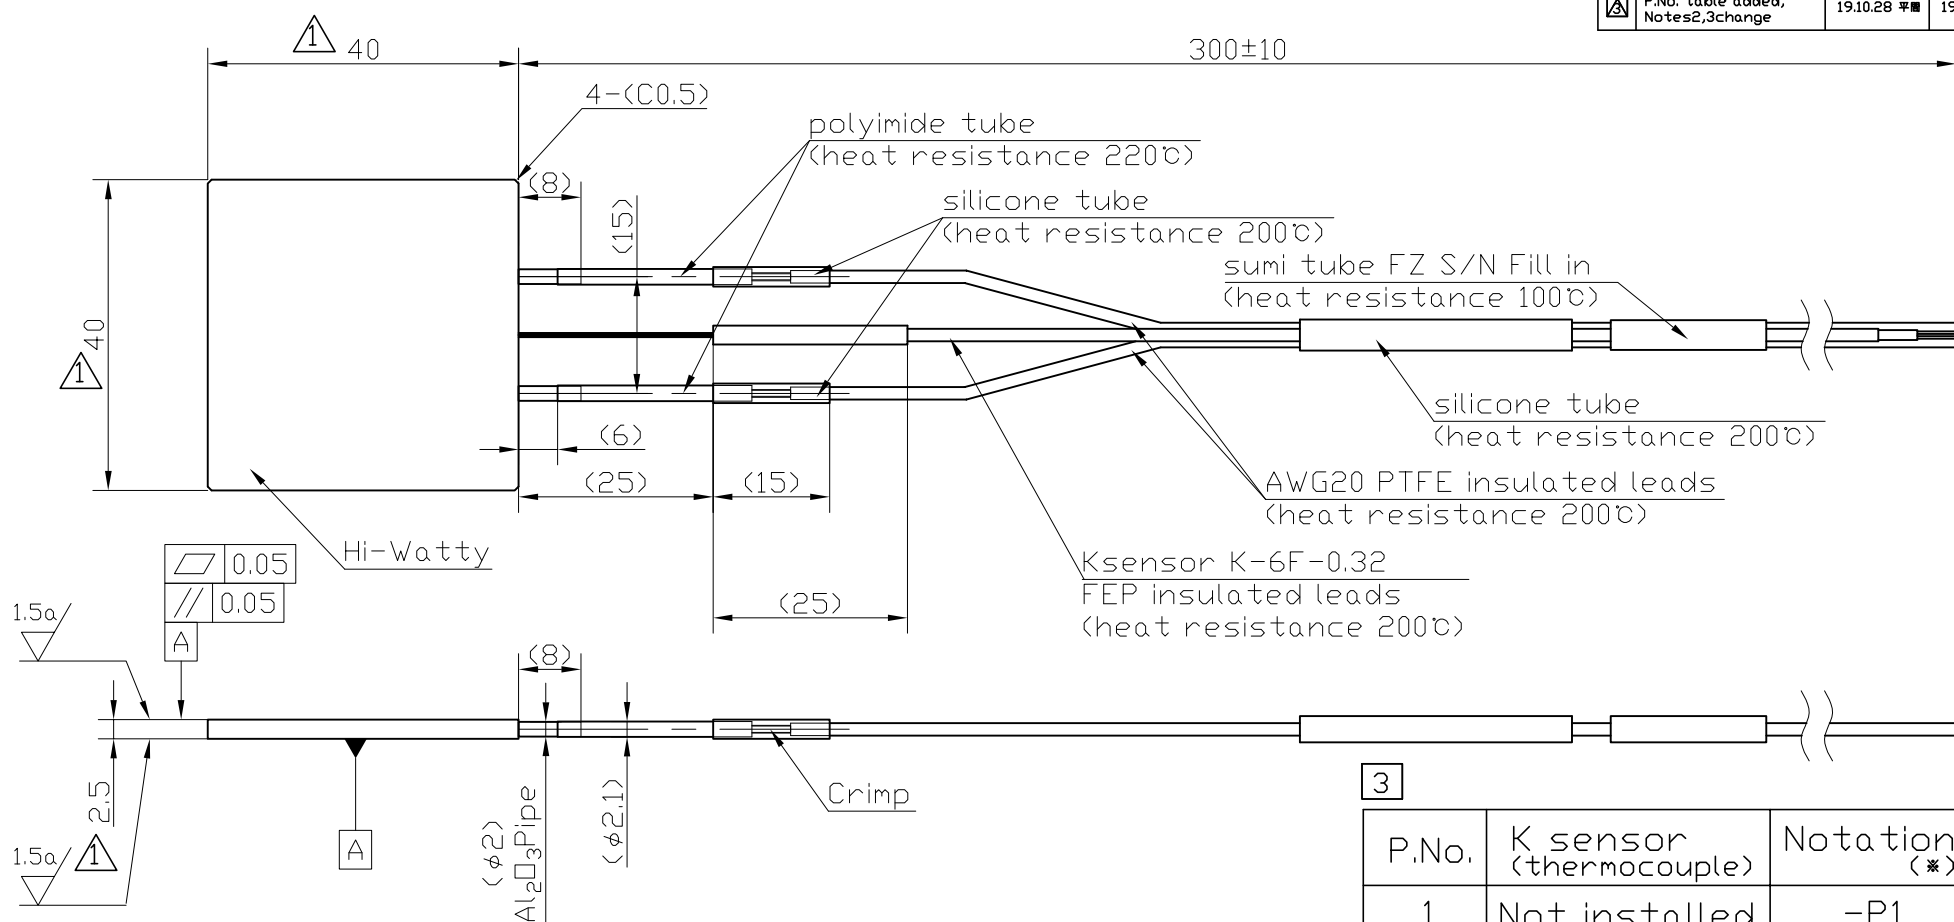


P.No.	K sensor (thermocouple)	Notation (*)
1	Not installed	-P1
2	Installed	-P2

(*) : KM05348-V04-P1 or -P2

• P.No.1 is equivalent to KM05349-V03.
 (P.No.2 is equivalent to KM05348-V03)
 • With the addition of P.No. table,
 drawing number KM05349
 has been discontinued.

NOTES

- △1. Voltage: 100V or 200V
- △△△2. Power: in the case 100V, 200W (AT R.T.)
 in the case 200V, 800W (AT R.T.)
- △△△3. Resistance: $50\Omega \pm 20\%$ (40.0~60.0 Ω) (AT R.T.)
- 4. Maximum Temperature: 400°C

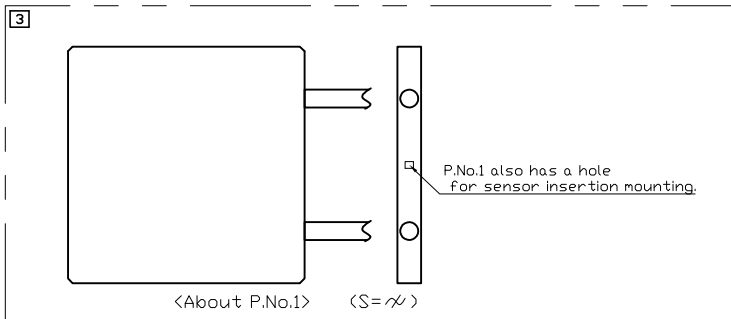

1	品名	図面番号	品名	数量	材質・仕様	備考
	Hi-Watty					
	Ro	1KV	0.05mm 3W	±0.05	±0.1	±0.2
	0.1φ	0.4mm	3mm 6W	±0.05	±0.1	±0.3
	0.2φ	0.8mm	6mm 30W	±0.1	±0.2	±0.5
	0.4φ	1.6mm	30mm 120W	±0.15	±0.3	±0.6
	0.8φ	3.2mm	120mm 400W	±0.2	±0.5	±1.0
	1.6φ	6.3mm	400mm 1000W	±0.3	±0.8	±2.0
	3.2φ	12.5mm	1000mm 2000W	±0.5	±1.2	±3.0
	6.3φ	25mm	2000mm 4000W	±0.8	±2.0	±5.0

設計	検出	承認
栗原	黒田	大石
18.07.27	18.07.27	18.07.27

図面番号	品名	数量	材質・仕様	備考
KM05348-V04	040 Hi-Watty Light TypeA External view			

ワッティ 株式会社

ABCDEFGHIJKLMNPOQRSTUVWXYZabcdefghijklmnopqrstuvwxyz