
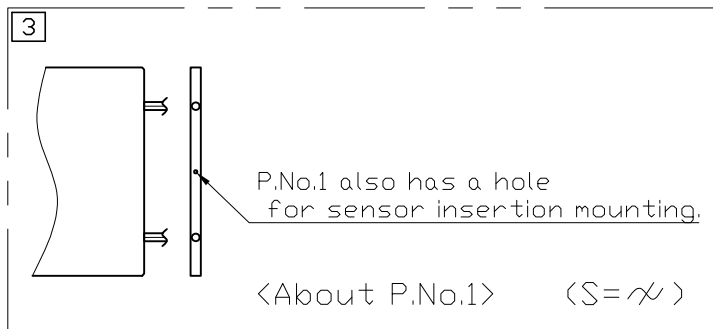


改訂	内容・ゾーン	担当者	承認
△	Dimensional tolerance	19.03.05 栗原	19.03.05 大石
△	NOTES Change	19.05.14 栗原	19.05.14 大石
△	P.No. table added	19.09.07 小川	19.09.09 大石

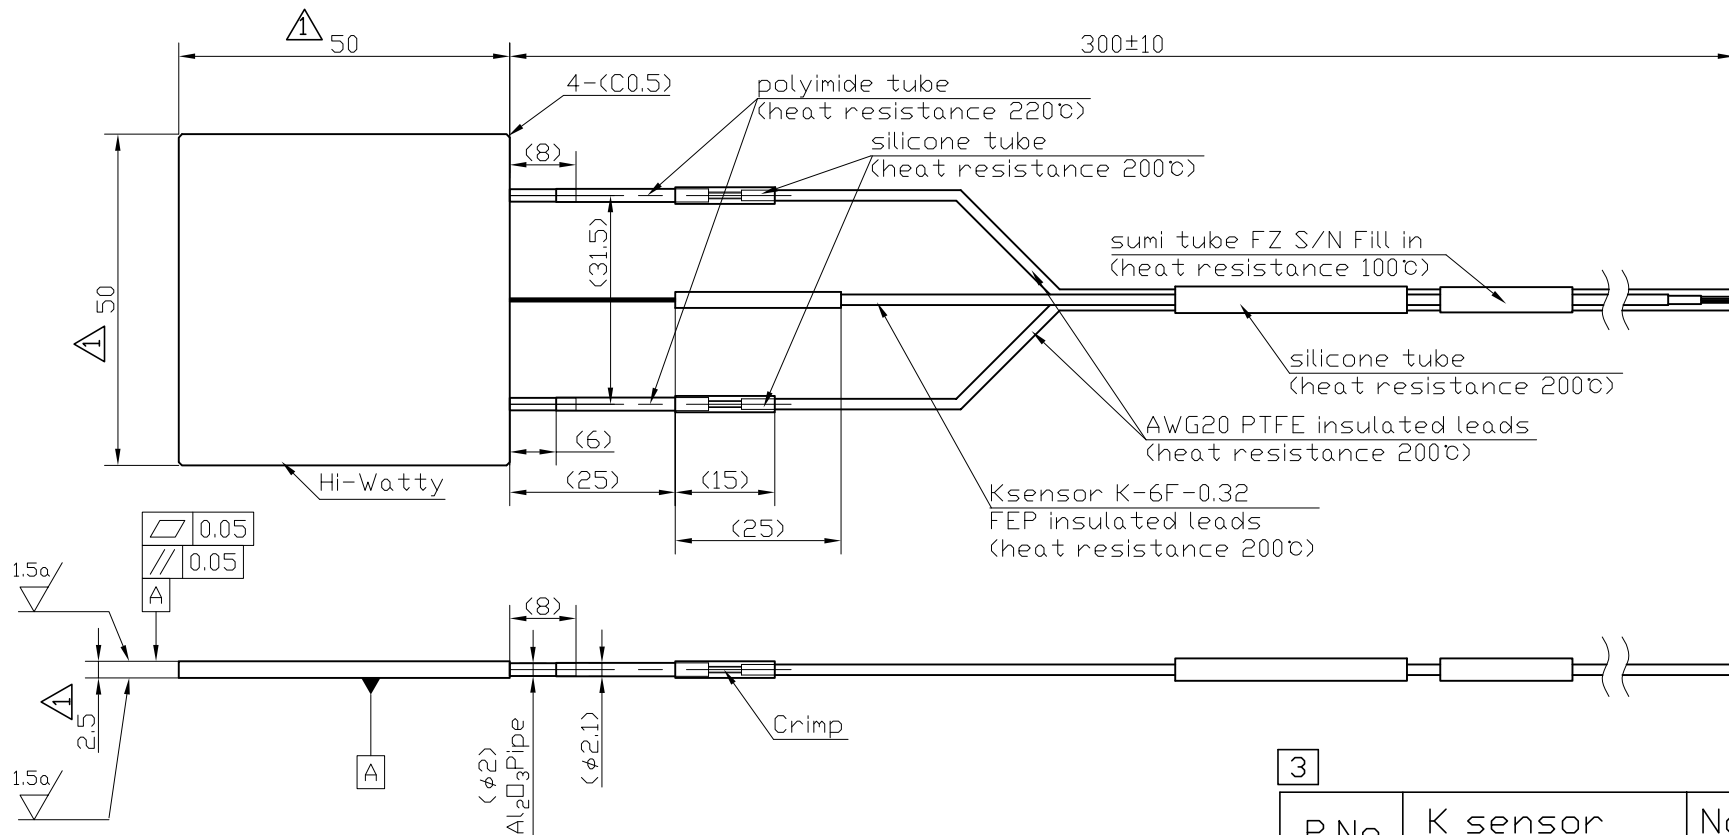

P.No.	K sensor (thermocouple)	Notation (*)
1	Not installed	-P1
2	Installed	-P2

(\*): KM05350-V04-P1 or -P2

• P.No.1 is equivalent to KM05351-V03.  
 (P.No.2 is equivalent to KM05350-V03)  
 • With the addition of P.No. table,  
 drawing number KM05351  
 has been discontinued.

### NOTES

- △1. Voltage: 100V or 200V
- △△2. Power: in the case 100V, 400W (AT R.T.)  
 in the case 200V, 1600W (AT R.T.)
- △ 3. Resistance:  $25\Omega \pm 20\%$  ( $20.0 \sim 30.0\Omega$ ) (AT R.T.)
- 4. Maximum Temperature: 400°C

材料	品番	図面番号	品名		数量	材質・仕様		備考																																																																																											
			SIZE	仕上		処理	備考																																																																																												
<table border="1"> <thead> <tr> <th>外径</th> <th>長さ</th> <th>電圧</th> <th>電力</th> <th>精度</th> <th>公差</th> <th>単位</th> </tr> </thead> <tbody> <tr> <td>0.2</td> <td>0.2</td> <td>0.2</td> <td>0.2</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>0.4</td> <td>0.4</td> <td>0.4</td> <td>0.4</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>0.6</td> <td>0.6</td> <td>0.6</td> <td>0.6</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>0.8</td> <td>0.8</td> <td>0.8</td> <td>0.8</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>1.0</td> <td>1.0</td> <td>1.0</td> <td>1.0</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>1.2</td> <td>1.2</td> <td>1.2</td> <td>1.2</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>2.5</td> <td>2.5</td> <td>2.5</td> <td>2.5</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>3.0</td> <td>3.0</td> <td>3.0</td> <td>3.0</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>4.0</td> <td>4.0</td> <td>4.0</td> <td>4.0</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> <tr> <td>5.0</td> <td>5.0</td> <td>5.0</td> <td>5.0</td> <td>±0.2</td> <td>±0.2</td> <td>mm</td> </tr> </tbody> </table>									外径	長さ	電圧	電力	精度	公差	単位	0.2	0.2	0.2	0.2	±0.2	±0.2	mm	0.4	0.4	0.4	0.4	±0.2	±0.2	mm	0.6	0.6	0.6	0.6	±0.2	±0.2	mm	0.8	0.8	0.8	0.8	±0.2	±0.2	mm	1.0	1.0	1.0	1.0	±0.2	±0.2	mm	1.2	1.2	1.2	1.2	±0.2	±0.2	mm	1.5	1.5	1.5	1.5	±0.2	±0.2	mm	2.0	2.0	2.0	2.0	±0.2	±0.2	mm	2.5	2.5	2.5	2.5	±0.2	±0.2	mm	3.0	3.0	3.0	3.0	±0.2	±0.2	mm	4.0	4.0	4.0	4.0	±0.2	±0.2	mm	5.0	5.0	5.0	5.0	±0.2	±0.2	mm
外径	長さ	電圧	電力	精度	公差	単位																																																																																													
0.2	0.2	0.2	0.2	±0.2	±0.2	mm																																																																																													
0.4	0.4	0.4	0.4	±0.2	±0.2	mm																																																																																													
0.6	0.6	0.6	0.6	±0.2	±0.2	mm																																																																																													
0.8	0.8	0.8	0.8	±0.2	±0.2	mm																																																																																													
1.0	1.0	1.0	1.0	±0.2	±0.2	mm																																																																																													
1.2	1.2	1.2	1.2	±0.2	±0.2	mm																																																																																													
1.5	1.5	1.5	1.5	±0.2	±0.2	mm																																																																																													
2.0	2.0	2.0	2.0	±0.2	±0.2	mm																																																																																													
2.5	2.5	2.5	2.5	±0.2	±0.2	mm																																																																																													
3.0	3.0	3.0	3.0	±0.2	±0.2	mm																																																																																													
4.0	4.0	4.0	4.0	±0.2	±0.2	mm																																																																																													
5.0	5.0	5.0	5.0	±0.2	±0.2	mm																																																																																													
			050 Hi-Watty Light TypeA		数量		図面番号																																																																																												
			External view		KM05350-V04		単位																																																																																												
					mm																																																																																														
			設計: 栗原 黒田 承認: 大石		18.07.27		ワッティ 株式会社																																																																																												
					18.07.27		A2																																																																																												